


NOTES

- | | | | |
|----|--|----------|----------|
| I. | COLOR CODE:
MAY BE SOLID COLOR OR TRACER IN WHITE WIRE | | |
| | Y YELLOW | W WHITE | BK BLACK |
| | G GREEN | O ORANGE | BL BLUE |
| | BR BROWN | S SLATE | |
| | P PURPLE (RED & BLUE TRACER) | R RED | |
| 2. | CABLES:

— — — — 115399 USED ON 115386 ASSEMBLY
— — — — 115400 USED ON 115387 ASSEMBLY
ALL STRAPS #20 BARE WIRE | | |
| 3. | TERMINAL BLOCKS ARE WIRED ON THE SIDE NEAREST THE JACK STRIP. | | |
| 4. | JACK STRIPS ARE VIEWED FROM THE REAR. | | |
| 5. | 115386 ASSEMBLY IS USED WITH THE SECO PRIMARY CONTROL UNIT AND WITH THE SINGLE-CIRCUIT SECO SECONDARY CONTROL UNIT.
115387 ASSEMBLY IS USED WITH THE TWO-CIRCUIT SECO SECONDARY CONTROL UNIT. | | |

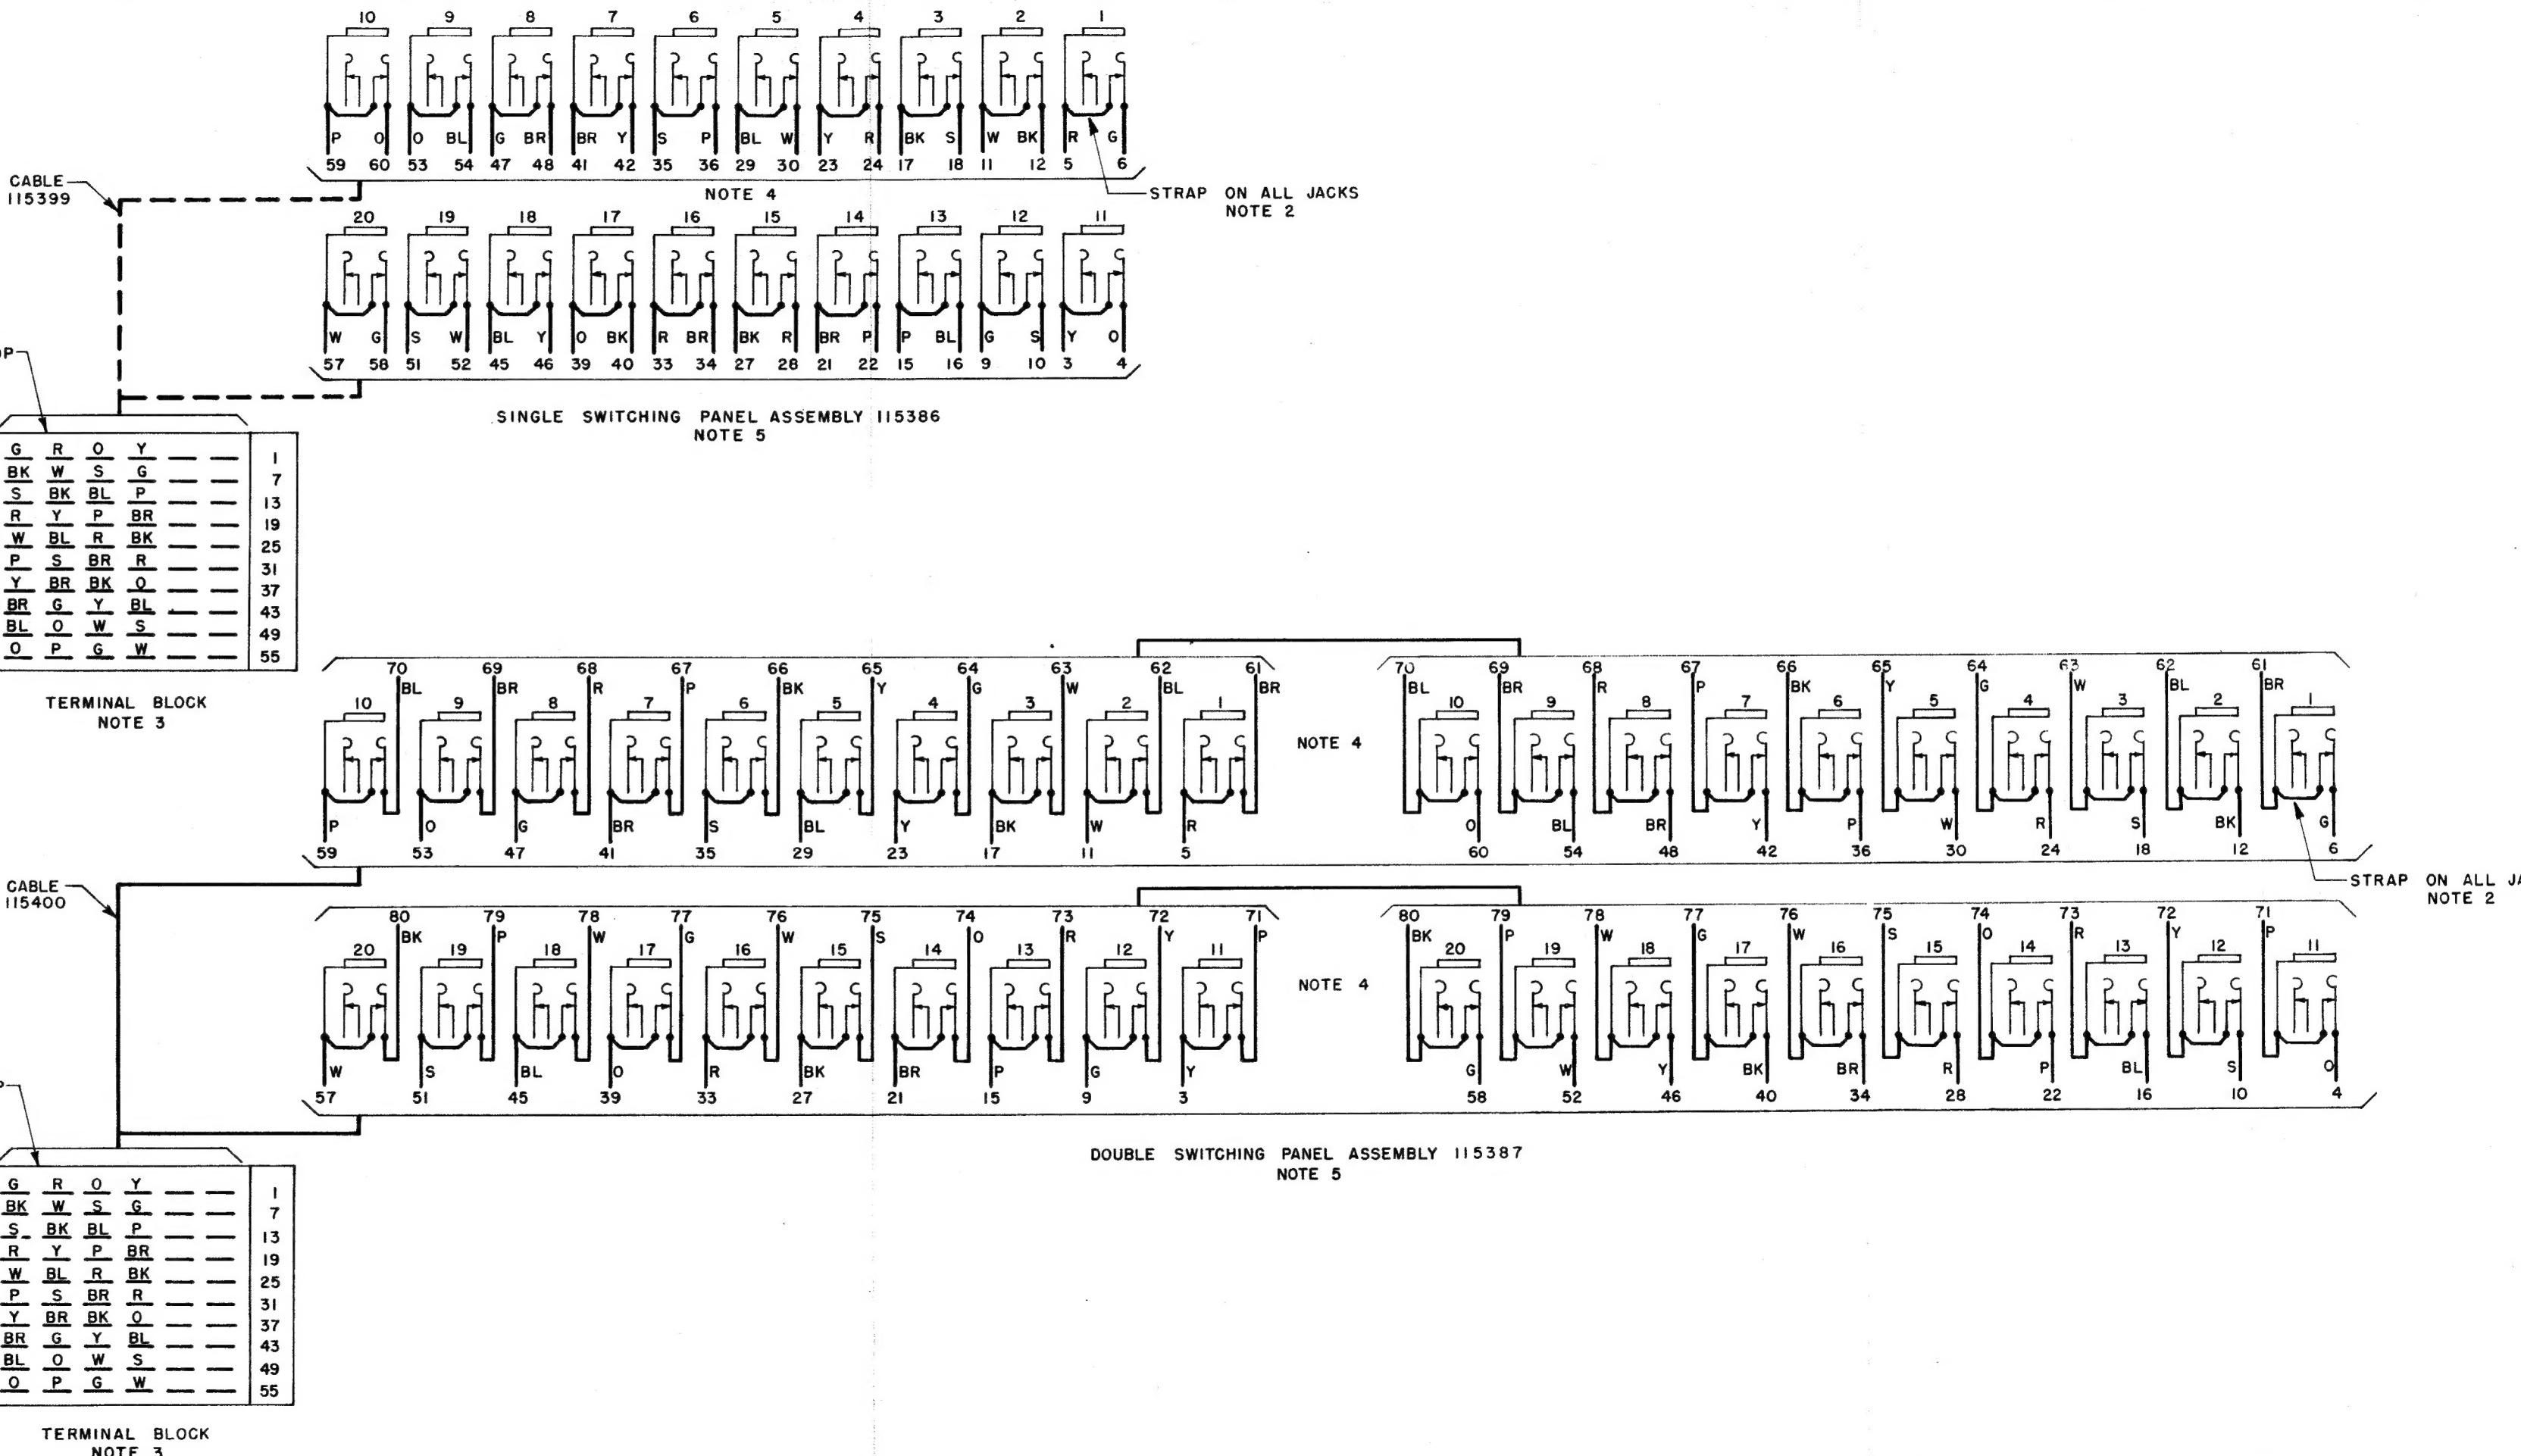

REVISI覩NS

WD-2473

**WIRING DIAGRAM
SECO SYSTEM
SWITCHING PANEL
ASSEMBLIES
115386, 11538**

DRAWN: H.T.C. APPROVED
ENG'R'D: RVB RSG
FILE: 2-A97AA

TELETYPE
CORPORATION